MDC

zintra™

Standard - Square CLOUDS

INSTALL GUIDE

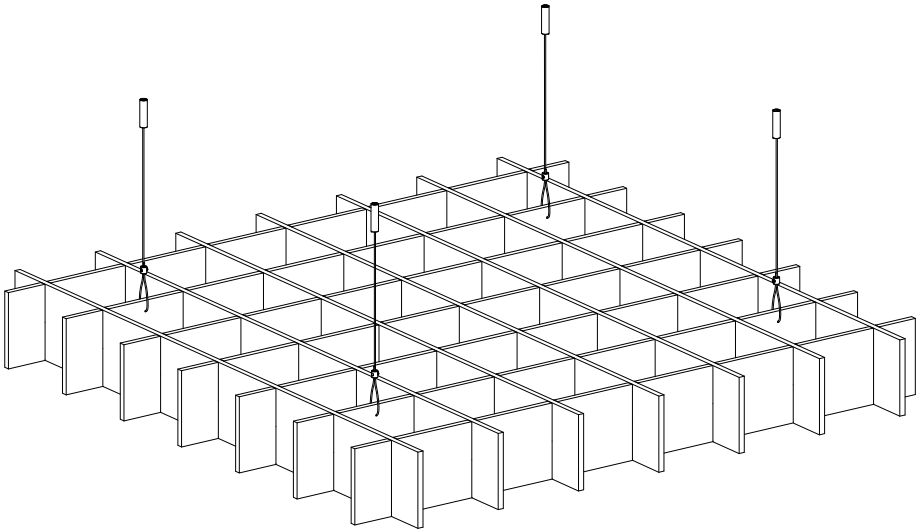

MDC 400 High Grove Blvd., Glendale Heights, IL 60139 | tel 800-621-4006 | fax 847-437-4017 | mdcwall.com

MDC

zintra™

STANDARD SQUARE CLOUDS
CONTENT GUIDE

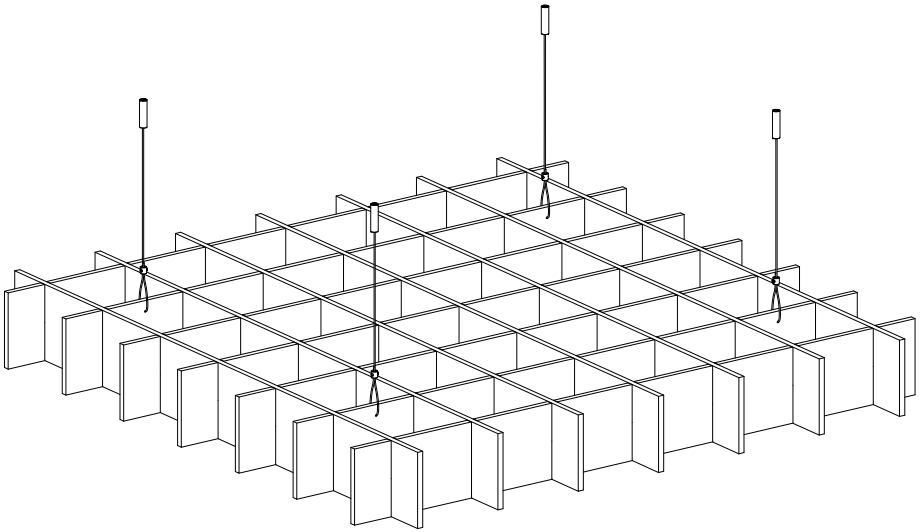

Cloud Assembly

4' x 4' x 5.5" Standard Square Cloud Assembly

(14) notched profile pieces-labeled
(4) aircraft wire sets containing:
Gripple wire adjustment piece, 5' length of wire, end swage, barrel and 1/4"-20 wood anchor.

4' x 9' x 5.5" Standard Square Cloud Assembly

(13) notched profile pieces-labeled
(4) aircraft wire sets containing:
Gripple wire adjustment piece, 5' length of wire, end swage, barrel and 1/4"-20 wood anchor.

9' x 9' x 9" Standard Square Cloud Assembly

(18) notched profile pieces-labeled
(4) aircraft wire sets containing:
Gripple wire adjustment piece, 5' length of wire, end swage, barrel and 1/4"-20 wood anchor.

STANDARD SQUARE CLOUD
ASSEMBLY

1. Locate "A" set of notched profile pieces and place in numerical order according to the labeled number on pieces (notches facing downward). This set of profile pieces will not have any pre-drilled holes for suspension.

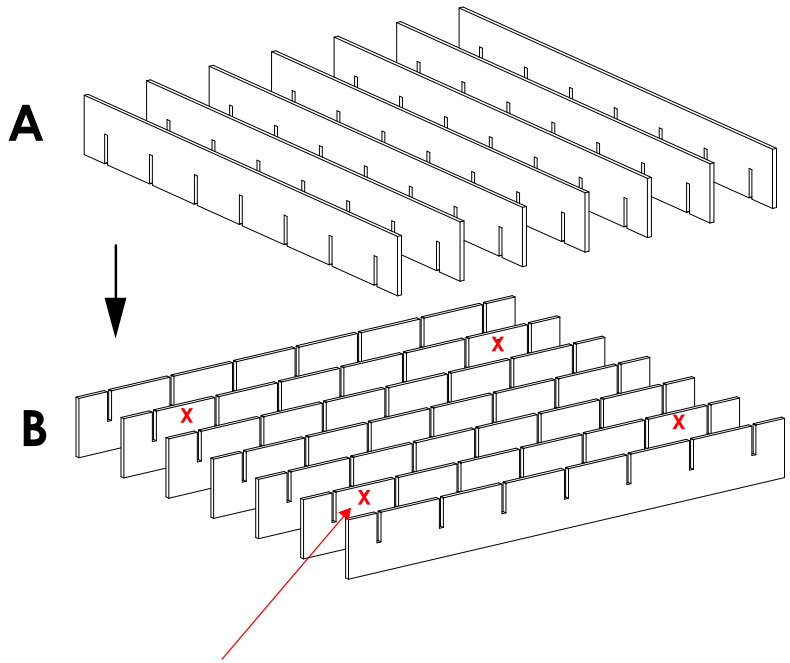

2. Locate "B" set of notched profile pieces and follow the same instructions as #1. This set will have the notched profile pieces facing upward toward set "A" and also have evenly spaced pre-drilled holes for suspension (see red X's for location).

3. Once the pre-drilled suspension holes have been located on the notched profile pieces, template the suspension hole locations to the ceiling substrate.

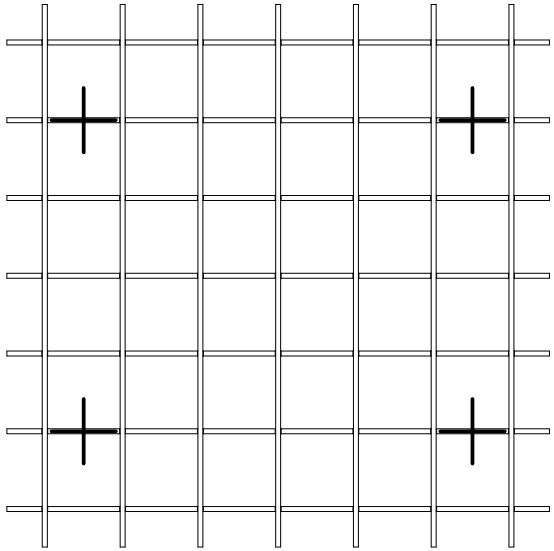

REFLECTED CEILING PLAN VIEW

STANDARD SQUARE CLOUD
SUSPENSION

4. After identifying each corresponding point on the ceiling substrate, drill and attach 1/4"-20 double sided stud to substrate. Reference detail (supplied for wood anchoring only). For all other substrates, studs/ anchors must be sourced by the installer.



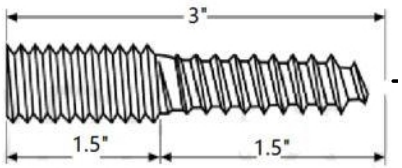

5.

A. Identify the threaded end of the barrel and the swage end of the wire.

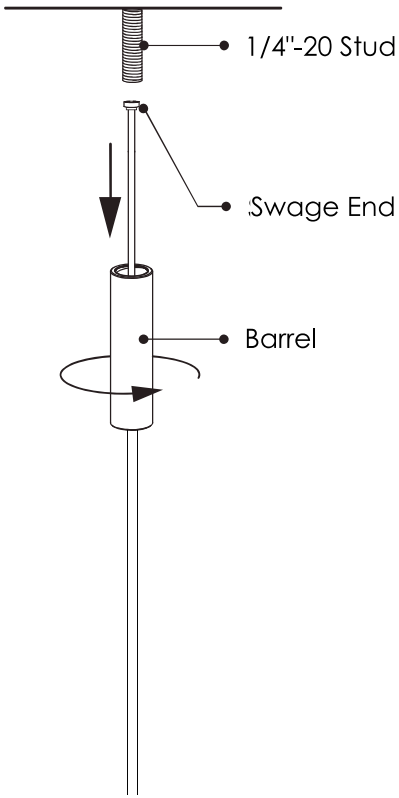

B. Insert the plain end of the supplied wire through the large threaded end of the barrel until the swage end is seated in the barrel.

C. Attach the threaded end of the barrel to the 1/4"-20 ceiling stud.

STANDARD SQUARE CLOUD
SUSPENSION

6.
A. Insert the plain end of the supplied wire through one side of the Gripple adjustment piece.

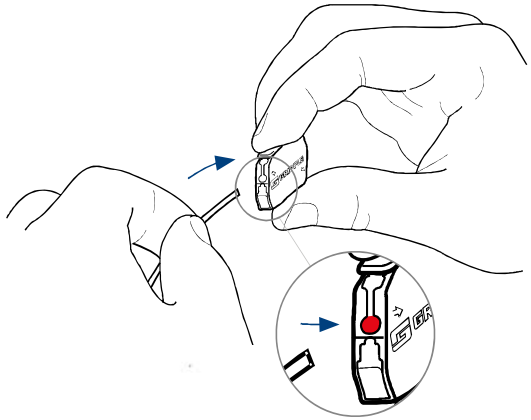

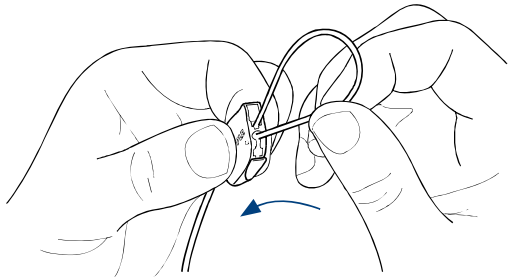

B. Loop wire through pre-drilled suspension points for final installation.

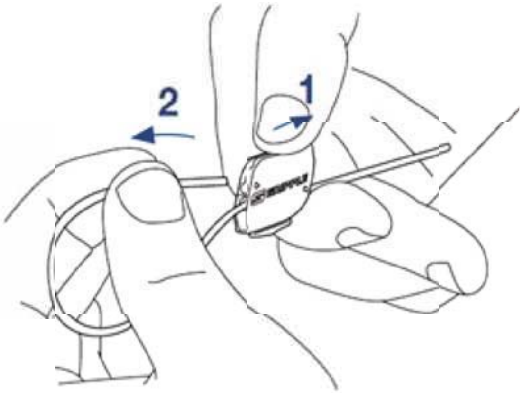

C. Re-insert plain end of wire once looped into the remaining side of the Gripple adjustment piece until secure.

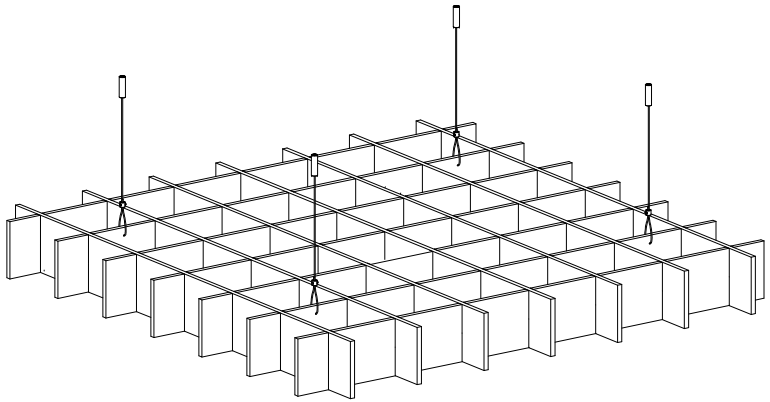

FINAL SUSPENDED VIEW

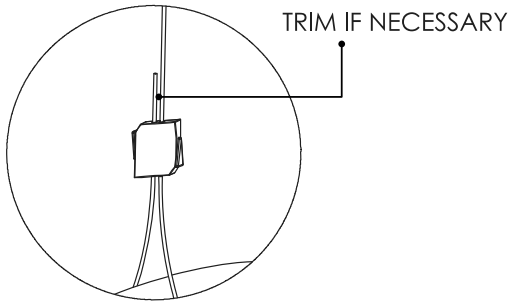

7. Once the cloud is properly suspended (reference above diagram), trim the access wire (if necessary) with wire cutters.

note: Gripple is infinitely adjustable by depressing tab on appropriate side.

zintra™